DCoMPASS®

Digital Compact Multi-purpose Advanced Stabilized System
Special Missions Aircraft

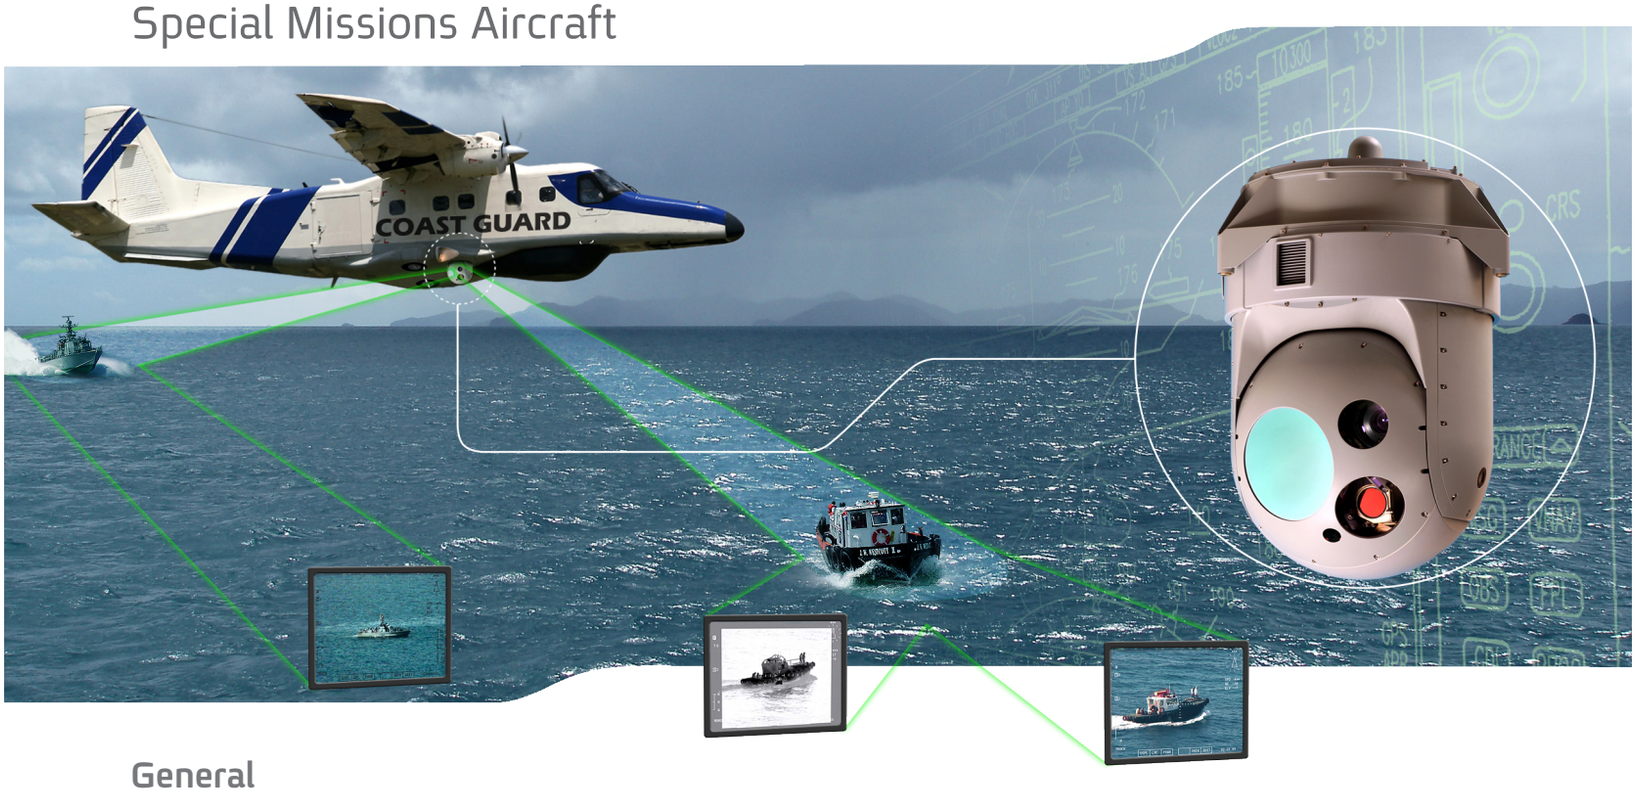

General

The DCoMPASS® payload is one of the newest members of our battle-proven stabilized EO payload family, in service with leading customers worldwide.

- Delivers superb day and night intelligence, surveillance, target acquisition and tactical reconnaissance (ISTAR) capabilities in the harshest weather conditions
- Single LRU configuration integrating up to five EO elements: HD color TV camera with optional low light mode, large format thermal imager, laser target illuminator, eyesafe laser range finder and laser target designator
- Lightweight, small payload made possible by new miniature digital electronics and advanced lightweight materials
- Battle proven, military-qualified for airborne application

Applications

- Long-range reconnaissance
- Maritime patrol
- Law enforcement

Elbit Systems
Electro-optics - Elop

DCoMPASS®

Digital Compact Multi-purpose Advanced Stabilized System
Special Missions Aircraft

Main Advantages & Features

- Highly stabilized crystal clear image on both HD color TV and thermal imager
- Compact and lightweight design permits additional payload and fuel capacity in the carrying platform while facilitating future upgrades
- Inertial measurement unit (IMU) provides highly accurate geo-location and rock solid stabilization
- Unique in-flight boresight mechanism enables long range precise laser designation
- Simple system integration with helmet mounted systems (HMS), radar and fire control applications
- Advanced video enhancement package including: haze penetration, color restoration and sharpening features

Technical Data

System:

Diameter	15″
Weight	33-38 kg
Angular coverage	
- Azimuth	N x 360º
- Elevation	+35º to -85º
Environmental conditions	MIL-STD-810

Day Channel (HD)

Camera type	Large format digital CCD color camera
Sensor	2/3″ CCD
No. of pixels	1394 x 1040

FOV (continuous zoom):

	Digital	Analog
Narrow	0.59º X 0.44º	0.36 º X 0.27º
Wide	24 º X 18 º	14 º X 10.5 º

Thermal Imager

FLIR	Cooled 3rd generation 3-5µm
	FPA with 640 x 512 pixels

FOV

	FLIR A – TOPAZ	FLIR B - LOTUS
Wide	24º X 18º	13.7 º X 10.4 º
Medium	Continuous	2.0 º X 1.5 º
Narrow	0.8 º X 0.6 º	0.61 º X 0.46 º

Laser Sensors

Laser Rangefinder (Eyesafe)

- Wavelength	1.54µm
- Rate	1 pps(10 pps option)

Dual Wavelength Laser Target Designator & Rangefinder (LRFTD)

- Transmitter technology	Diode-pumped advanced
- Wavelength	1.064 µm / 1.57 µm
- Max pulse rate	20pps

Laser target illuminator/pointer

- Wavelength	830 nm (NVG compatible)

Interface Communications

RS422
MIL-STD-1553
Ethernet

Video Output

PAL, NTSC
Gigabit Ethernet (GigE)

Additional features

Geo-location using Inertial Measurement Unit (IMU)
Auto-tracker
Step & Stare
Picture In Picture (PIP)

Elbit Systems Electro-optics - Elop Ltd.
Advanced Technology Park P.O.B. 1165 Rehovot 76111, Israel
Tel: 972-8-9387201, Fax: 972-8-9386335
E-mail: payloads@elbitsystems.com www.elbitsystems.com/elop

7/12 This brochure contains Elbit Systems proprietary information © 2012 Elbit Systems Ltd. and others